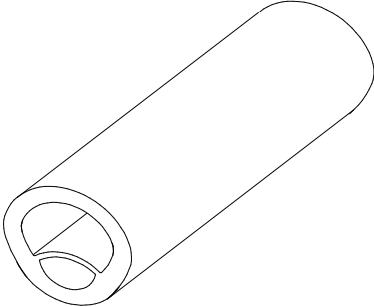


|  |   |                                      |                                   |
|--|---|--------------------------------------|-----------------------------------|
| <b>DATA SHEET</b><br>N° DS/028   | <b>TRASP SYSTEM</b><br>TRANSPARENT SLEEVE FOR ELECTRONICS IT. 190 |                                      | REL: 3                            |
| DATE: 27/04/98   |   |                                      |                                   |
| <b>DRAWING</b>   |   |                                      |                                   |
|   |   |                                      |                                   |
| <b>REFERENCE ITEMS</b>   |   |                                      |                                   |
| 190/10 - 190/15 - 190/MT   |   |                                      |                                   |
| <b>GENERAL CHARACTERISTICS</b>   |   |                                      |                                   |
| THIS SLEEVE IS SPECIFICALLY AIMED TO ELECTRONICS, WHERE CABLES STANDARD DIAMETERS DO NOT ALLOW TO USE THE USUAL SLEEVES. |   |                                      |                                   |
| <b>CHARACTERISTICS OF THE MATERIAL</b>   |   |                                      |                                   |
| TYPE OF MATERIAL   | SOFT P.V.C.   |                                      |                                   |
| COLOR  | TRANSPARENT   |                                      |                                   |
| TEMPERATURE RANGE  | - 50 ÷ +80 °C (-58 ÷ +176 °F)                                     |                                      |                                   |
| FIRE RESISTANCE  | CLASS VO ACCORDING TO UL -94                                      |                                      |                                   |
| RESISTANCE TO WATER  | ☺   |                                      |                                   |
| RESISTANCE TO OILS   | ☺   |                                      |                                   |
| RESISTANCE TO DUST   | ☺   |                                      |                                   |
| RESISTANCE TO ACIDS  | ☺   |                                      |                                   |
| TOXIC MATERIALS ABSENCE OF   | PCB,PCT,PBB,PBDO,VC (MAX. 1 PPM)                                  |                                      |                                   |
| <b>ITEMS</b>   | <b>CUT LENGTH</b><br>mm./INCH.                                    | <b>CABLE EXT.</b><br>DIAM. mm./INCH. | <b>N° OF PIECES</b><br>PER PACK   |
| 190/10   | 10 / 0.39   | 0.6 ÷ 1.2 / 0.02 ÷ 0.05              | 1000                              |
| 190/15   | 15 / 0.59   | 0.6 ÷ 1.2 / 0.02 ÷ 0.05              | 1000                              |
| 190/MT   | 25000 / 984   | 0.6 ÷ 1.2 / 0.02 ÷ 0.05              | 1                                 |
| <b>NOTE:</b>   |   |                                      |                                   |
| <b>PREPARED:</b>   | <b>CHECK.,APPROV.</b>   | <b>DATE:</b>                         | <b>SUBJECT MATTER OF REVISION</b> |
| Cazzulo Paola  | SA:   | 27/04/1998                           | ADJUSMENT TO NEW PRODUCT SIZE     |
|  |   |                                      | <b>PAG:</b><br>1 of 1             |